

NM, NMS Close Coupled Centrifugal Pumps

with flanged connections



Construction

Close-coupled centrifugal pumps; electric motor with extended shaft directly connected to the pump up to 30 kW, new bracket construction for standard motors (stub-shaft construction) from 37 to 75 kW with integrated thrust bearing.

Pump casing with axial suction and radial delivery on top, main dimensions and performance according to EN 733.

NM(S): version with pump casing and lantern bracket in cast iron.
B-NM(S): version with pump casing and lantern bracket/casing cover in bronze. (the pumps are supplied fully painted).

Connections: Flanges according to PN 10, EN 1092-2.

Counter-flanges (on request)

Sizes	Flanges
from NM 32/.. to NM 50/...	Screwed flanges EN 1092-1, PN 16
from NM 65/.. to NMS 100/250	Flanges for welding EN 1092-1, PN 10

Applications

- For clean liquids without abrasives, which are non-aggressive for the pump materials (solids content up to 0,2%).
- For water supply.
- For heating, air conditioning, cooling and circulation plants.
- For civil and industrial applications.
- For fire fighting applications. - For irrigation.

Operating conditions

Liquid temperature from -10 °C to +90 °C.

Ambient temperature up to 40° C.

Total suction lift up to 7 m.

Maximum permissible working pressure up to 10 bar.

Continuous duty.

Motor

2-pole induction motor, 50 Hz (n ≈ 2900 rpm).

NM, NMS: three-phase 230/400 V ± 10% up to 3 kW;

400/690 V ± 10% from 4 to 75 kW.

Insulation class F. Protection IP 54.

Classification scheme IE2 for three-phase motor from 0,75 kW.

Constructed in accordance with: EN 60034-1; EN 60034-30.


Special features on request

- Other voltages. - Frequency 60 Hz (as per 60 Hz data sheet).
- Protection IP 55.- Special mechanical seal.
- Packed gland (only for NM standard construction).
- Single-phase motor (NMM) up to 1,5 kW.
- Explosion proof construction in accordance with Directive 94/9 EEC (ATEX).
- Higher or lower liquid or ambient temperatures.

Materials

Components	NM, NMS	B-NM, B-NMS
Pump casing Lantern bracket NM Casing cover for NMS	Cast iron GJL 200 EN 1561	Bronze G-Cu Sn 10 EN 1982
Lantern bracket NMS	Cast iron GJL 200 EN 1561	
Impeller	Cast iron GJL 200 EN 1561	Bronze G-Cu Sn 10 EN 1982
	Brass P- Cu Zn 40 Pb 2 UNI 5705 for NM 32/12-16-20, NM 40/20, B-NM 32/125-160-200, B-NM 40/200	
Shaft	AISI 303 up to 2.2 kW	Cr Ni Mo steel AISI 316
	AISI 430 from 3 kW to 75 kW	
Mechanical seal	Carbon - Ceramic - NBR	
Counter-flanges	Steel Fe 430B UNI 7070	

Coverage chart n ≈ 2900 rpm

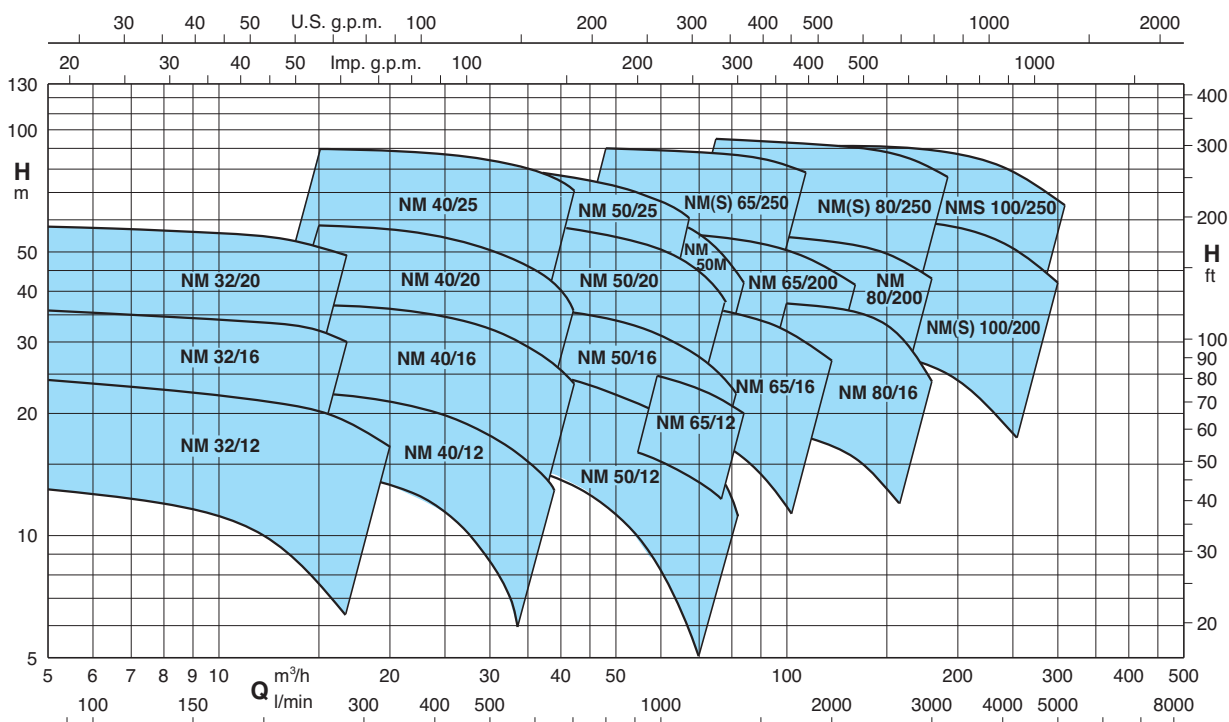

NM, NMS Close Coupled Centrifugal Pumps

with flanged connections

Performance $n \approx 2900$ rpm

B-NM	NM	P ₂		Q	6,6	7,5	8,4	9,6	10,8	12	13,2	15	16,8	18,9	21	24	27	30
		kW	HP	m³/h l/min	110	125	140	160	180	200	220	250	280	315	350	400	450	500
B-NM 32/12F	NM 32/12FE	0,55	0,75	H m	12,5	12,5	12	11,5	11	10	9	7,5						
B-NM 32/12D	NM 32/12DE	0,75	1		18	18	17,5	17	16,5	16	15,5	14						
B-NM 32/12A	NM 32/12AE	1,1	1,5		23	23	22,5	22	21,5	21	20,5	19						
B-NM 32/12S	NM 32/12SE	1,5	2		23,5	23,5	23	22,5	22	21,5	21	20,5	19*	18,5*	16,5*	13*		
B-NM 32/16B	NM 32/16BE	1,5	2		29,5	29,5	29	28,5	27,5	27	26	25*	22,5*					
B-NM 32/16A/A	NM 32/16A/A	2,2	3		35,5	35,5	35	34,5	34	33,5	33	32*	30*					
B-NM 32/20D/A	NM 32/20D/A	2,2	3		38	37,5	37	36	35	33,5	32							
B-NM 32/20C/A	NM 32/20C/A	3	4		45	44,5	44	43,5	42,5	41	40	38	36*					
B-NM 32/20A/A	NM 32/20A/A	4	5,5		57,5	57	56	55,5	55	54,5	53,5	51,5	49*					

B-NM	NM	P ₂		Q	15	16,8	18,9	21	24	27	30	33	37,8	39	42	45	48	54
		kW	HP	m³/h l/min	250	280	315	350	400	450	500	550	630	650	700	750	800	900
B-NM 40/12F	NM 40/12F/A	1,1	1,5	H m	14	13,5	13	12	11	9,5	8	6						
B-NM 40/12C	NM 40/12C/A	1,5	2		17,5	17	16,5	16	15	13,5	12	10,5	7,5	6,5				
B-NM 40/12A/A	NM 40/12A/B	2,2	3		22	22	21,5	21	20	19	18	16,5	14	13	11,5			
B-NM 40/16C/A	NM 40/16C/B	2,2	3		23	22,5	22	21,5	20	18,5	16,5	14,5	11	10				
B-NM 40/16B/A	NM 40/16B/B	3	4		29	28,8	28	27,5	26,5	25	23,5	21,5	18	17	14			
B-NM 40/16A/A	NM 40/16A/B	4	5,5		37	36,5	36,5	36	35	33,5	32	30,5	27	26	23,5	20	17	
B-NM 40/20D/A	NM 40/20D/A	4	5,5		39	38	37	35,5	33,5	30,5	27	22,5	14					
B-NM 40/20C/A	NM 40/20C/A	4	5,5		41,5	40,5	39,5	38	36	33,5								
B-NM 40/20B/A	NM 40/20B/A	5,5	7,5		50	49,5	48,5	47,5	45,5	43,5	41,5	37,5	30,5					
	NM 40/20AR/A	5,5	7,5		55	54,5	54	53	51	49								
B-NM 40/20A/A	NM 40/20A/A	7,5	10		57,5	57	56,5	55,5	54,5	52,5	50,5	48	42,5	40,5	35			
B-NM 4025/C/B	NM 40/25C/B	9,2	12,5		61	61	60,5	59,5	58,5	56,5	53,5	49,5	41,5	40	33,5			
B-NM 4025/B/B	NM 40/25B/B	11	15		69,5	69,5	69	68,5	67	65,5	63,5	60,5	53,5	51	45			
B-NM 4025A/B	NM 40/25A/B	15	20		90	90	89,5	89	88,5	87	85	83	77,5	76	70,5			

B-NM	NM	P ₂		Q	24	27	30	33	37,8	42	48	54	60	66	69	72	75	78	81	84
		kW	HP	m³/h l/min	400	450	500	550	630	700	800	900	1000	1100	1150	1200	1250	1300	1350	1400
B-NM 50/12F/A	NM 50/12F/B	2,2	3	H m			15,5	15	14	13,5	12	10	8	6						
B-NM 50/12D/A	NM 50/12D/B	3	4				20	19,5	18,5	18	16,5	14,5	13	10,5	9	8				
B-NM 50/12A/A	NM 50/12A/B	4	5,5				24	24	23	22,5	21	19,5	17,5	15	14	12,5	11,5	10		
B-NM 50/12S/A	NM 50/12S/B	4	5,5				26,5	26	25,5	24,5	23,5	22	20	18	16,5	15,5	14	13	11	
B-NM 50/16B/B	NM 50/16B/B	5,5	7,5				31	30,5	29,5	28	26	24	21,5	19	17,5	15,5	13,5	11,5	9,5	
B-NM 50/16A/B	NM 50/16A/B	7,5	10				38,5	38	37,5	36,5	34,5	32,5	30	27	25,5	24	22,5	20,5	19	
B-NM 50/20B/B	NM 50/20B/B	9,2	12,5		48	47,5	47,5	47	45,5	44,5	42,5	40	37	33	30,5	28	25,5	23		
B-NM 50/20A/B	NM 50/20A/B	11	15		55	55	54,5	54,5	53,5	52	50	48	45	41,5	39,5	37	35	32,5		
B-NM 50/20S/B	NM 50/20S/B	15	20		60	60	59,5	59,5	58,5	57,5	55,5	53,5	50,5	47	45	43	40,5	37		
B-NM 5025/C/B	NM 50/25C/B	11	15		55	54,5	54	53	51,5	49,5	46	41,5	35,5	28,5	24,5					
B-NM 5025/B/B	NM 50/25B/B	15	20		69	68,5	68	67,5	66	64	61	57	52,5	46,5	43					
B-NM 5025A/B	NM 50/25A/B	18,5	25		80,5	80,5	80	79,5	78,5	77	74,5	71,5	67	61,5	58,5					
B-NM 5025/65E/A	NM 50M/E/A	11	15			48	47,5	47	46	45	43	40	37	32	29,5	27	24			
B-NM 5025/65D/A	NM 50M/D/A	15	20				57	56,5	56	55	53	51	48	44,5	42	39,5	37	32	29	25*
B-NM 5025/65C/A	NM 50M/C/A	18,5	25				68	67,5	67	66,5	65	63	61	58	56	53,5	51,5	48	45,5	42*

B-NM - B-NMS	NM - NMS	P ₂		Q	37,8	42	48	54	60	66	75	84	96	108	120	132	150	168
		kW	HP	m³/h l/min	630	700	800	900	1000	1100	1250	1400	1600	1800	2000	2200	2500	2800
	NM 65/12E/A	4	5,5	H m	18	17,5	17	16,5	16	15	13,5*							
B-NM 65/125C/A	NM 65/12C/A	5,5	7,5		22	21,5	21	20,5	20	19,5	18	15,5*						
B-NM 65/125A/A	NM 65/12A/A	7,5	10		26	25,5	25	24,5	24	23,5	22	20*						
B-NM 65/160E/A	NM 65/16E/A	5,5	7,5				20	19,5	19	18,5	17	15,5	13*	10*				
B-NM 65/160D/A	NM 65/16D/A	7,5	10				26	25,5	25	24,5	23,5	22	20*	16,5*	13*			
B-NM 65/160C/A	NM 65/16C/A	9,2	12,5				30	29,5	29	28,5	28	26,5	24,5*	21,5*	18*			
B-NM 65/160B/A	NM 65/16B/A	11	15				33,5	33	32,5	32	31	30	28*	25,5*	22*			
B-NM 65/160A/A	NM 65/16A/A	15	20				38	37,5	37	36,5	36	35	33*	30,5*	27*			
B-NM 65/200C/A	NM 65/20C/A	15	20				44	43,5	43	42,5	41	39,5	37,5*	35*	31*	27*		
B-NM 65/200B/A	NM 65/20B/A	18,5	25				50	49,5	49	48,5	47,5	46,5	44,5*	42*	39*	35*		
B-NM 65/200A/A	NM 65/200A/A	22	30				56,5	56	55,5	55	54,5	53,5	51*	48,5*	45,5*	41,5*		
B-NM 65/250C/A	NM 65/250C/A	22	30				64	63,5	63	61,5*	60*	57,5*	54,5*	50*				
B-NM 65/250B/A	NM 65/250B/A	30	40				79,5	79	78,5	78*	77*	75*	72*	67*				
B-NMS 65/250A	NMS 65/250A	37	50				90	89,5	89	88,5*	87,5*	86*	83,5*	78,5*				

NM, NMS Close Coupled Centrifugal Pumps

with flanged connections

Performance $n \approx 2900$ rpm

B-NM - B-NMS	NM - NMS	P ₂		Q	75	84	96	108	120	132	150	168	180	192	210	240	270	300
				m³/h														
		kW	HP	l/min														
B-NM 80/160E/A	NM 80/16E/A	7,5	10	H m	20	19,3	18,5	17,5*	16,5*	15,5*	13*							
B-NM 80/160D/A	NM 80/16D/A	9,2	12,5		23	22,5	22	21*	19,5*	18*	15*							
B-NM 80/160C/A	NM 80/16C/A	11	15		27,5	27	26,5	25,5*	24,5*	23*	20*	16*						
B-NM 80/160B/A	NM 80/16B/A	15	20		34	33,5	33	32,5*	32*	31*	28*	23*	18*					
B-NM 80/160A/A	NM 80/16A/A	18,5	25		38,5	38	37,5	37*	36,5*	36*	33*	29*	24*					
B-NMS 80/200B	NM 80/200B/A	22	30		46,5	46	45,5	44,5	43,5*	42*	39*	35,5*	32*					
B-NMS 80/200A	NM 80/200A/A	30	40		56	55,5	55	54	53*	52*	49,5*	46*	43*					
B-NMS 80/250E	NM 80/250E/A	22	30		51	50	48,5	46,5	44,5*	42*	38*	33*	29*					
B-NMS 80/250D	NM 80/250D/A	30	40		65	64	62,5	61	59*	56,5*	53*	49*	45,5*	41*				
B-NMS 80/250C	NMS 80/250C	37	50		73,5	73	72	70,5	69*	67*	63*	59*	55,5*	51,5*				
B-NMS 80/250B	NMS 80/250B	45	60		84	83,5	82,5	81,5	80*	78*	74,5*	70,5*	67*	63*				
B-NMS 80/250A	NMS 80/250A	55	75		95	94,5	93,5	92,5	91,5*	90*	87,5*	84*	80,5*	76,5*				
B-NMS 100/200E	NM 100/200E/A	18,5	25					30	29,5	29	28	27	26*	25*	23*	19*		
B-NMS 100/200D	NM 100/200D/A	22	30					36	35,5	35	34	33	32*	31*	29*	24,5*	19*	
B-NMS 100/200C	NM 100/200C/A	30	40					45	44,5	44	43,5	42,5	41,5*	40,5*	39*	34,5*	29*	22°
B-NMS 100/200B	NMS 100/200B	37	50					54	53,5	53	52,5	51,5	50,5*	49,5*	48*	44*	38,5*	32°
B-NMS 100/200A	NMS 100/200A	45	60					61,5	61	60,5	60	59,5	58,5*	58*	56,5*	53*	48*	42°
B-NMS 100/250B	NMS 100/250B	55	75					73,5	73	72,5	71,5	70	68,5*	67*	65*	61*	55,5*	48,5°
B-NMS 100/250A	NMS 100/250A	75	100					91	90,5	90	89,5	88,5	88*	87*	85*	81*	75*	67°

NM(S) Standard construction.

B-NM(S) Bronze construction.

P₂ Rated motor power output.

H Total head in m.

* Maximum suction lift 1-2 m.

◦ With 1 m suction head.

Tolerances according to ISO 9906, annex A.





Rated currents

P ₂		230V Δ / 400V Y 400V Δ / 690V Y			I _A /I _N
kW	HP	I _N A	I _N A	I _N A	
0,55	0,75	3	1,7		4,3
0,75	1	3,3	1,9		5,8
1,1	1,5	4,7	2,7		5,6
1,5	2	7,5	4,3		5,5
2,2	3	9,2	5,3		7,4
3	4	11,5	6,6		8,2
4	5,5		9,6	5,5	7,6
5,5	7,5		10,9	6,3	9,1
7,5	10		14,3	8,3	9,1
9,2	12,5		18,5	10,7	8,2
11	15		21,5	12,4	8,5
15	20		27,3	15,8	9,5
18,5	25		34	19,6	9,4
22	30		41	23,7	10,7
30	40		54	31,2	8,8
37	50		64	36,9	7,2
45	60		77	44,5	7,3
55	75		93	53,7	6,8
75	100		128	73,9	7

P₂ Rated motor power output.

I_A/I_N D.O.L. starting current / Nominal current





Characteristic curves $n \approx 2900$ rpm

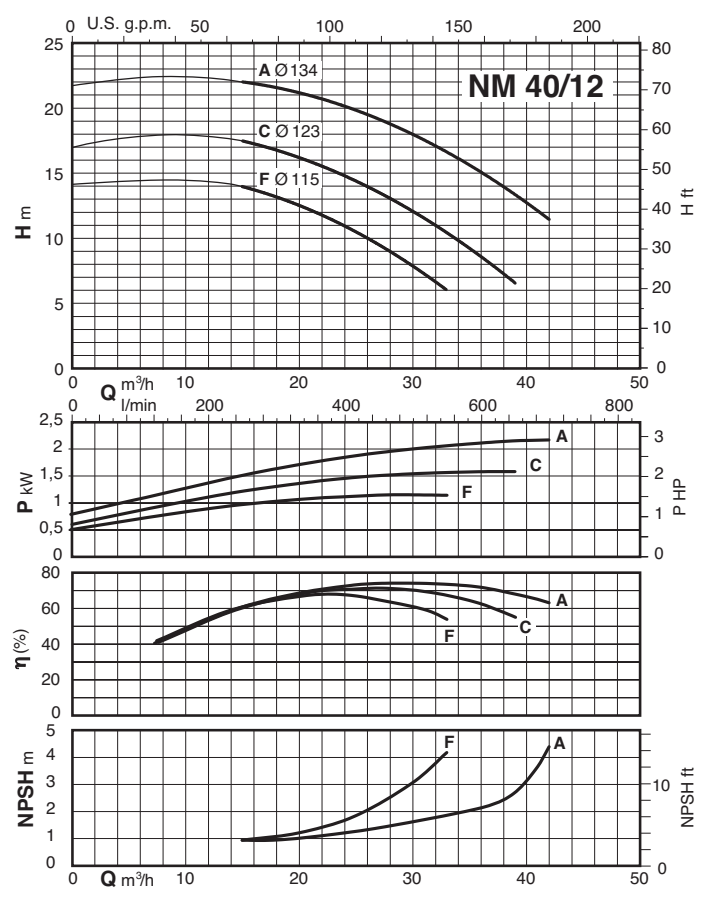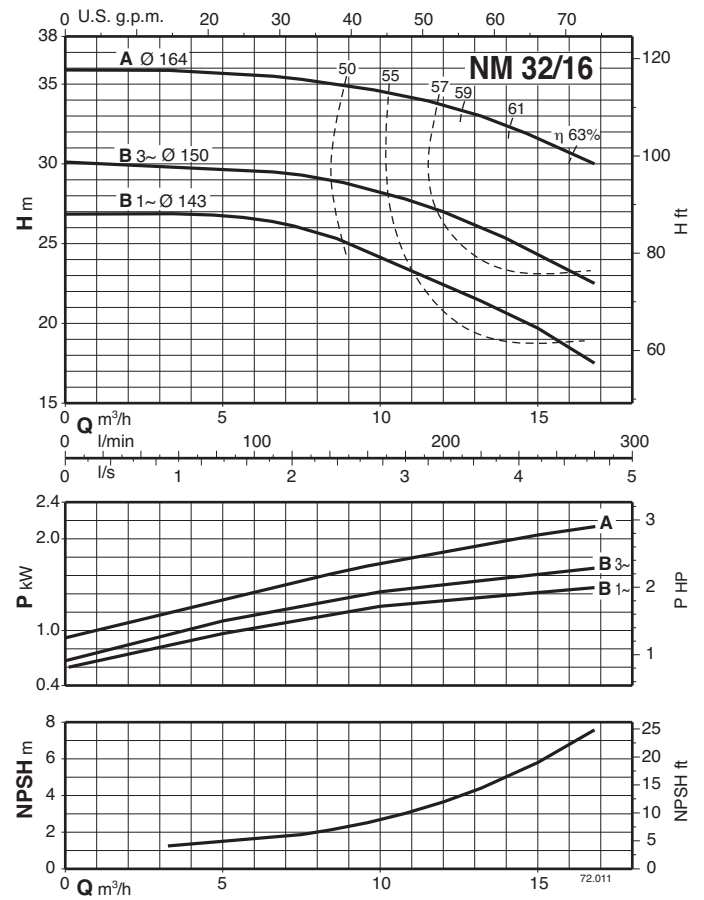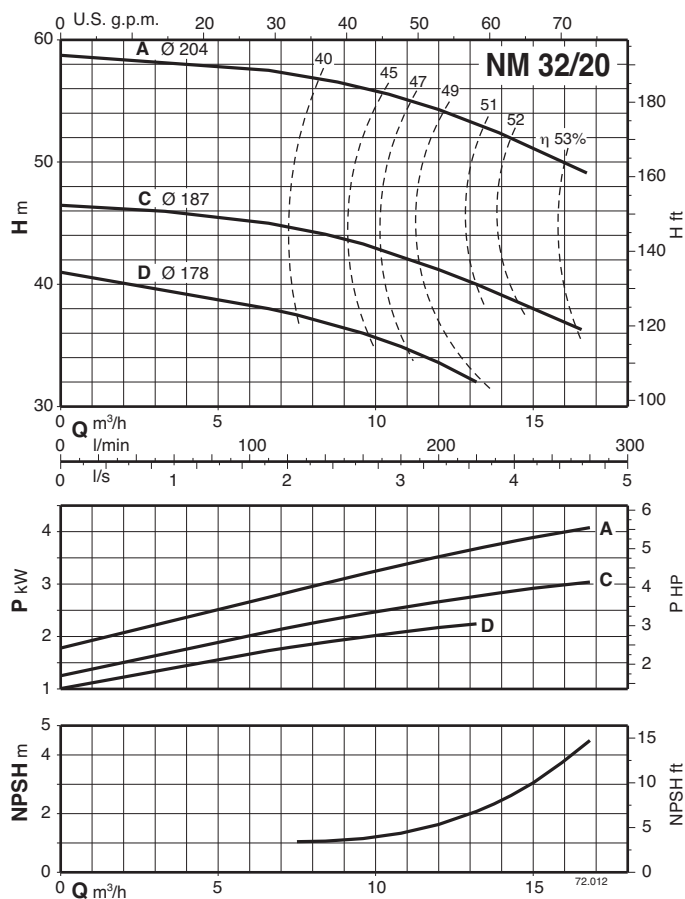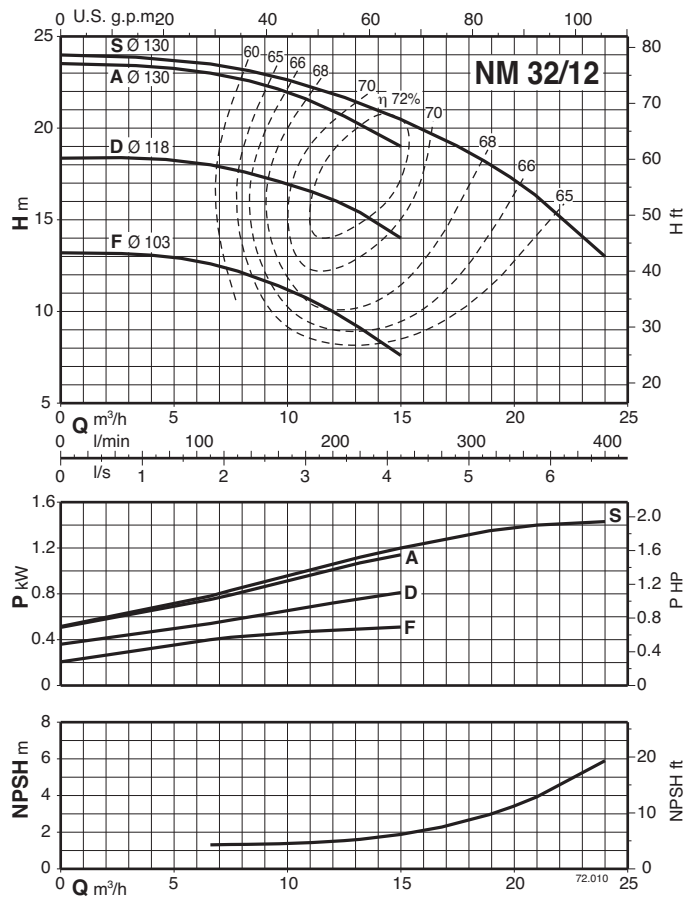

NM, NMS Close Coupled Centrifugal Pumps

with flanged connections





Characteristic curves $n \approx 2900$ rpm

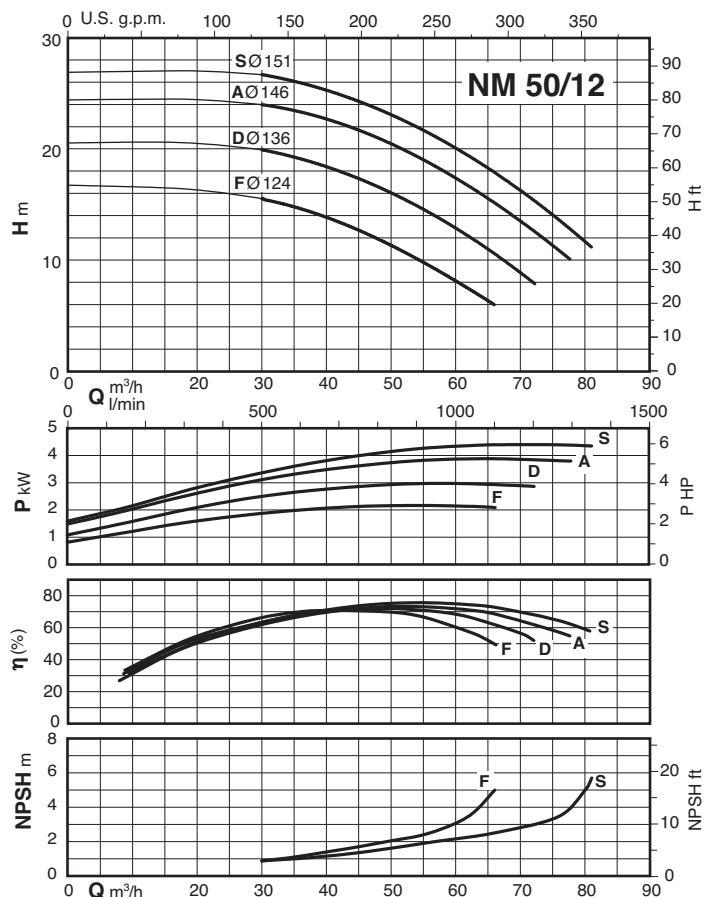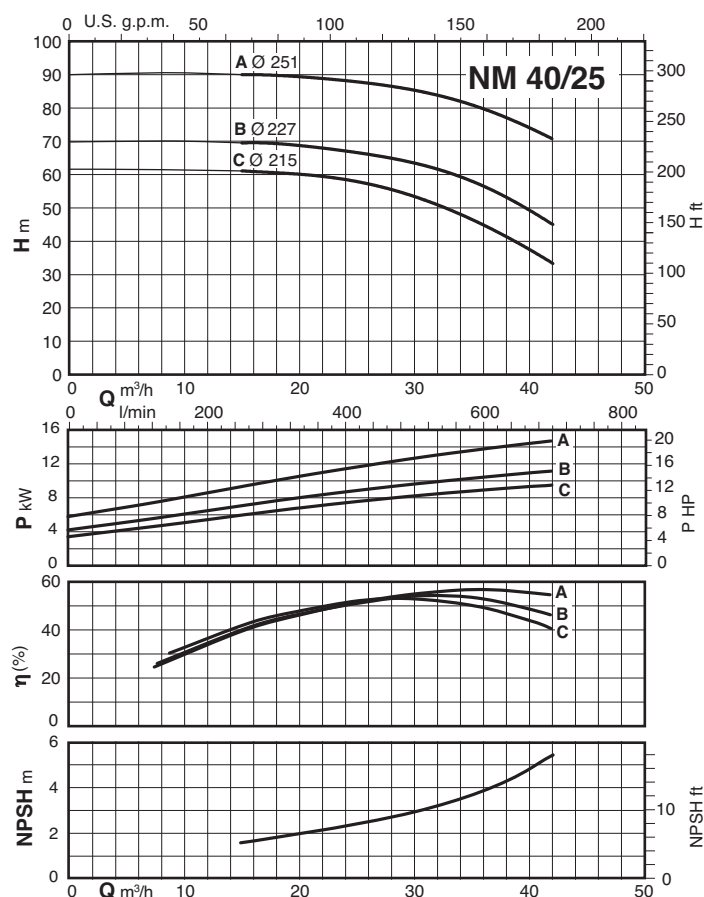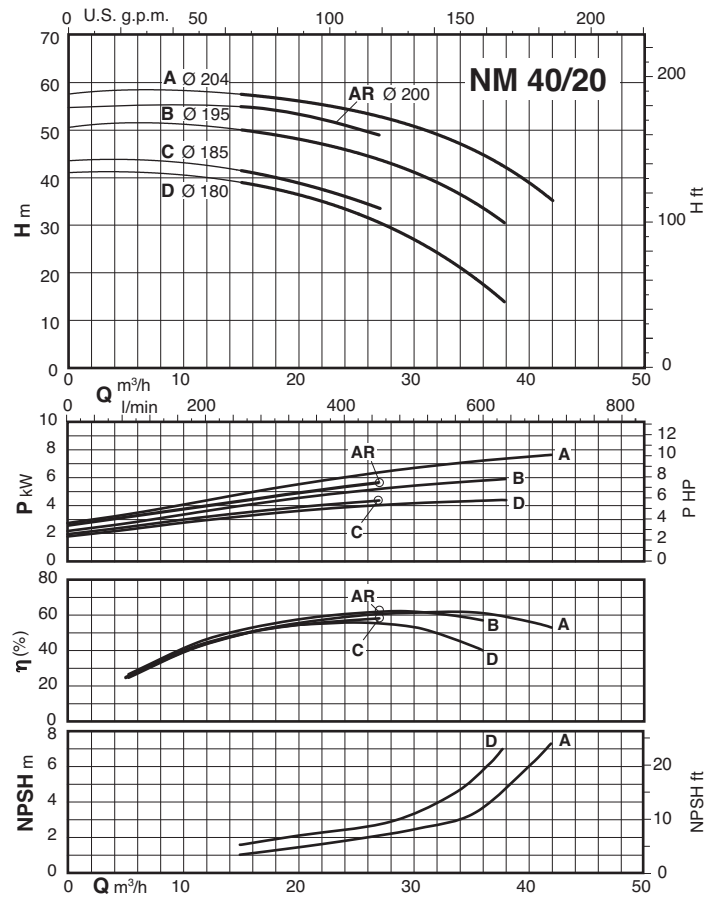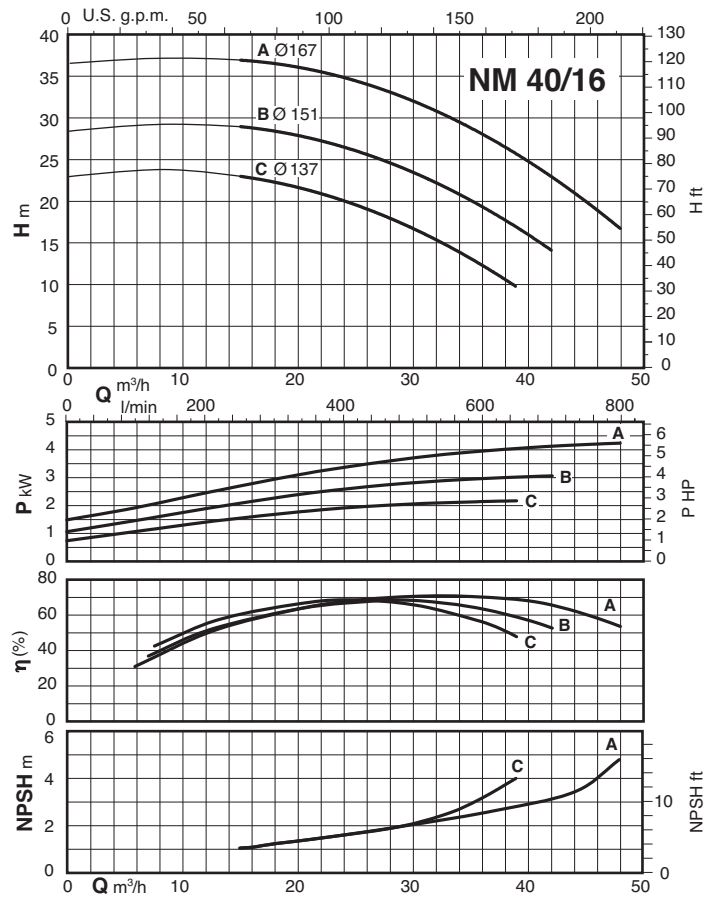

NM, NMS Close Coupled Centrifugal Pumps





with flanged connections

Characteristic curves $n \approx 2900$ rpm

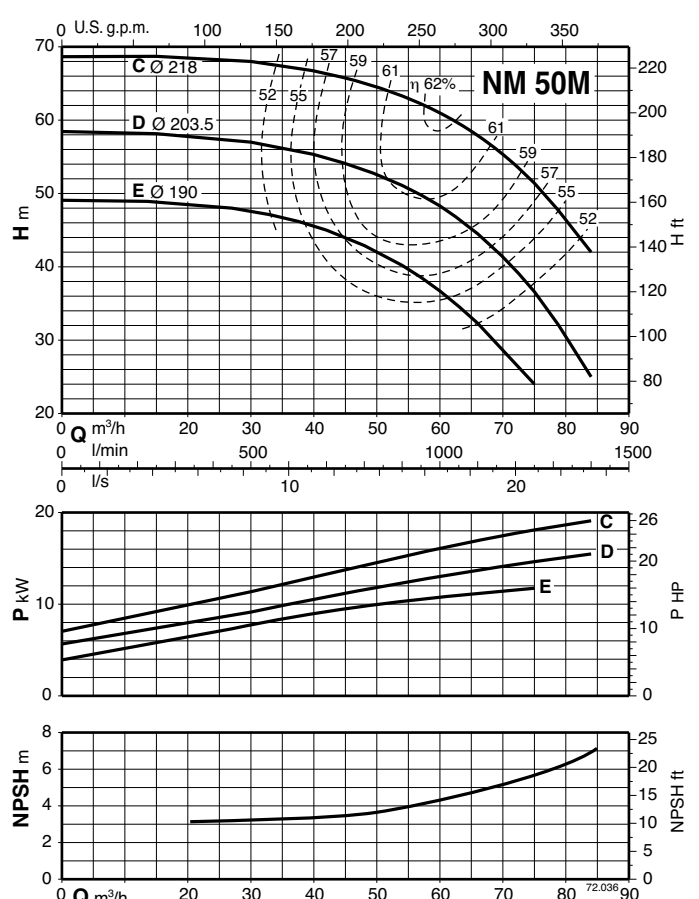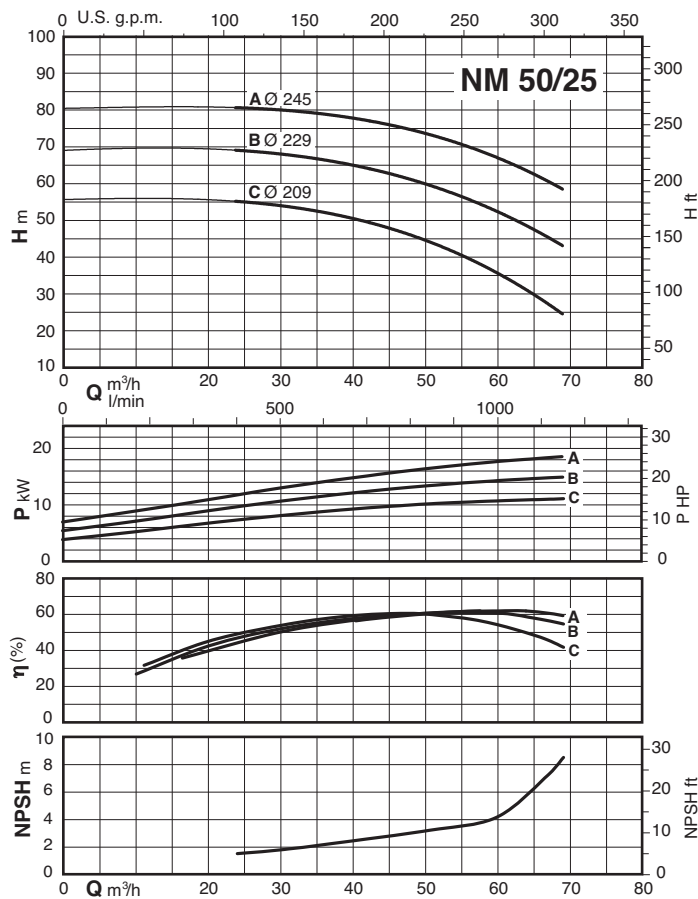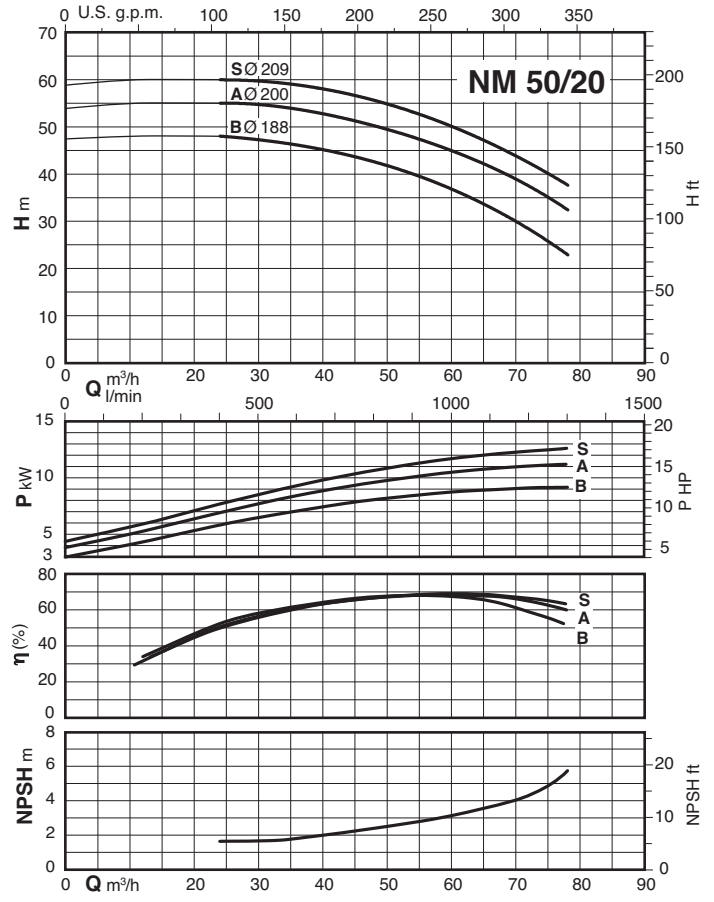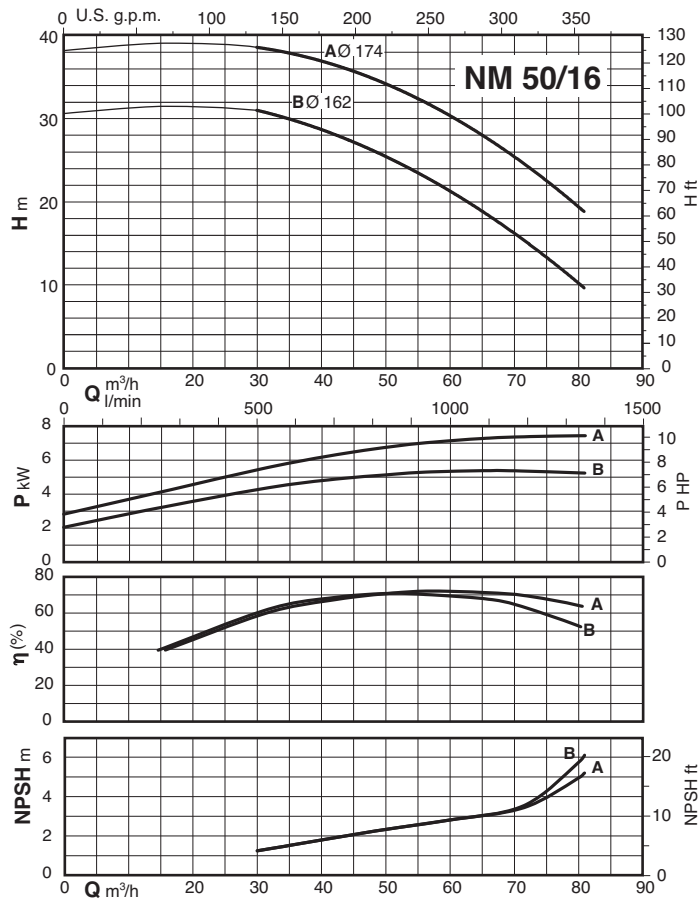




NM, NMS Close Coupled Centrifugal Pumps with flanged connections

Characteristic curves $n \approx 2900$ rpm

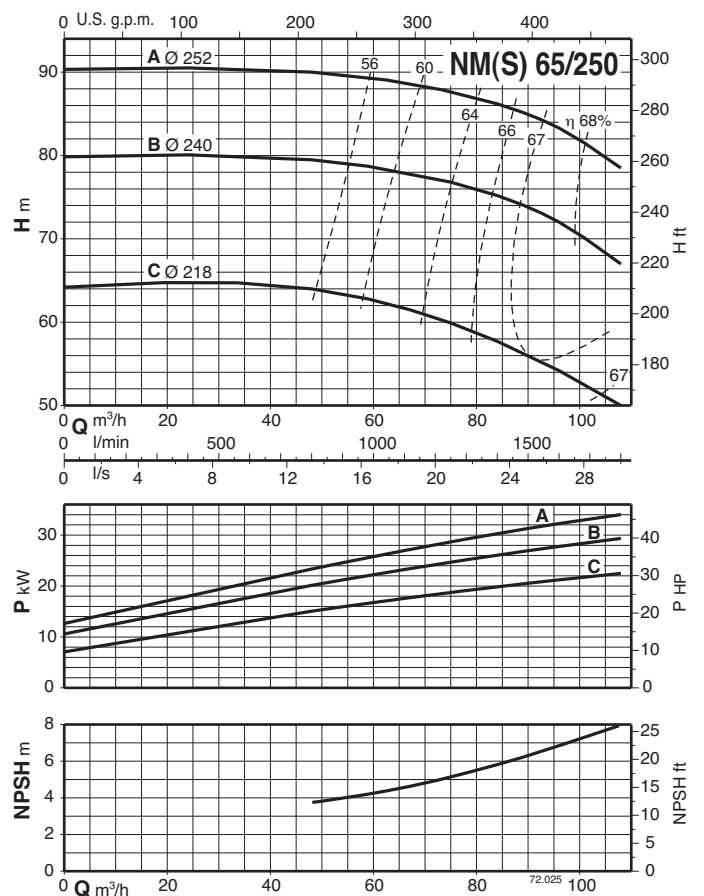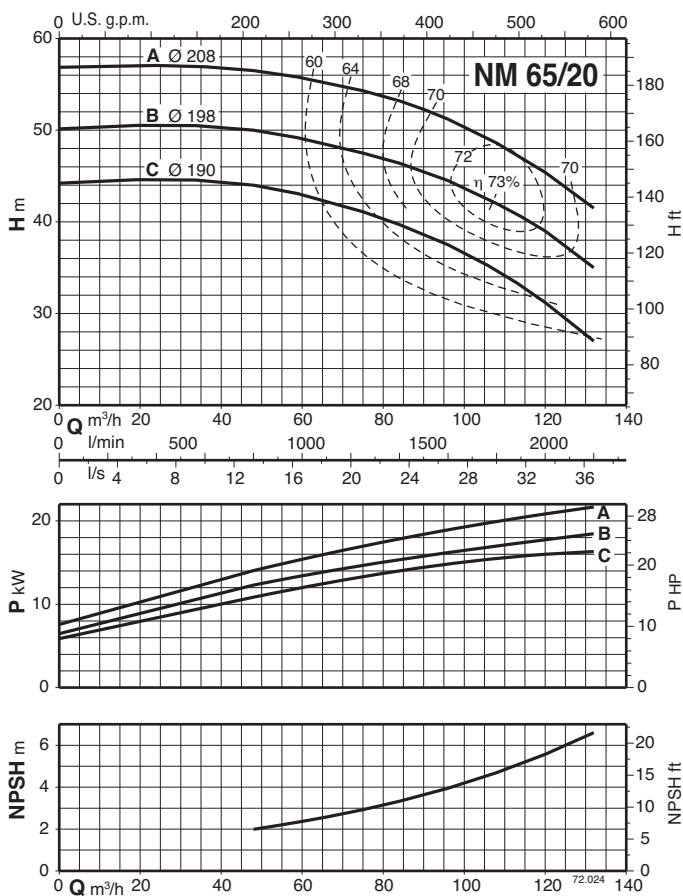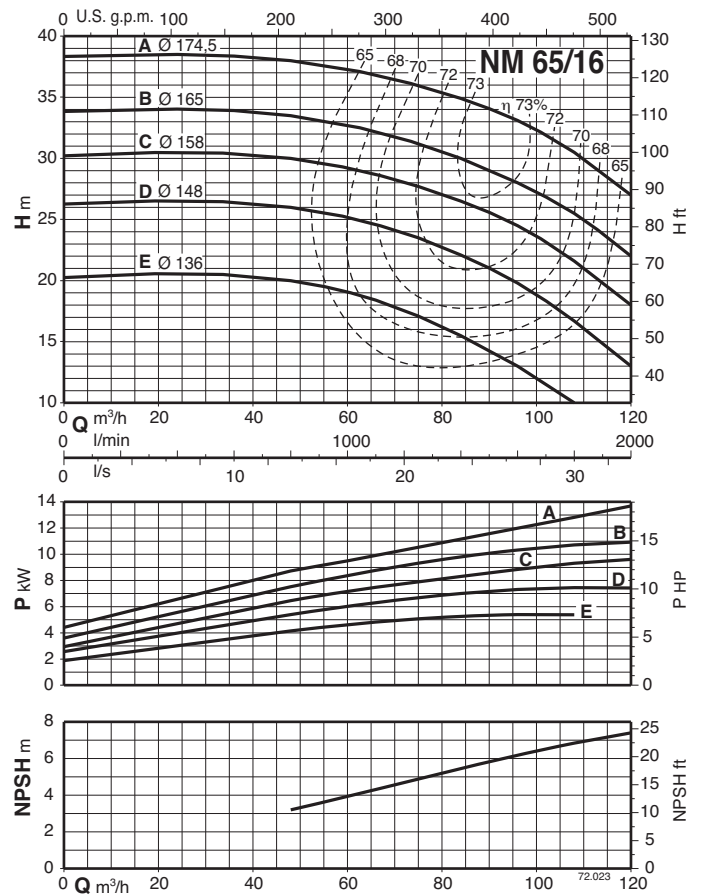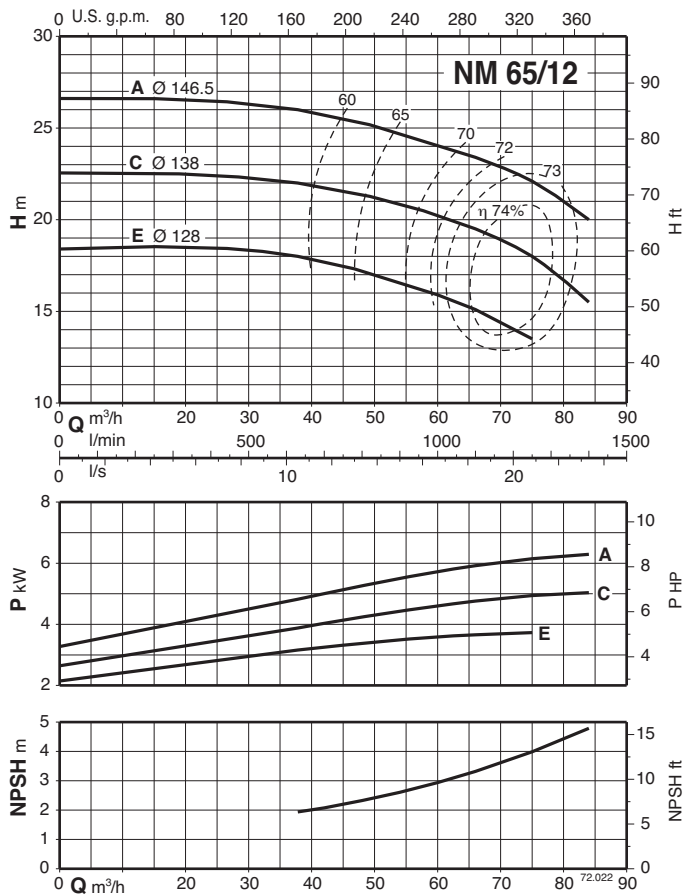



NM, NMS Close Coupled Centrifugal Pumps with flanged connections

Characteristic curves $n \approx 2900$ rpm

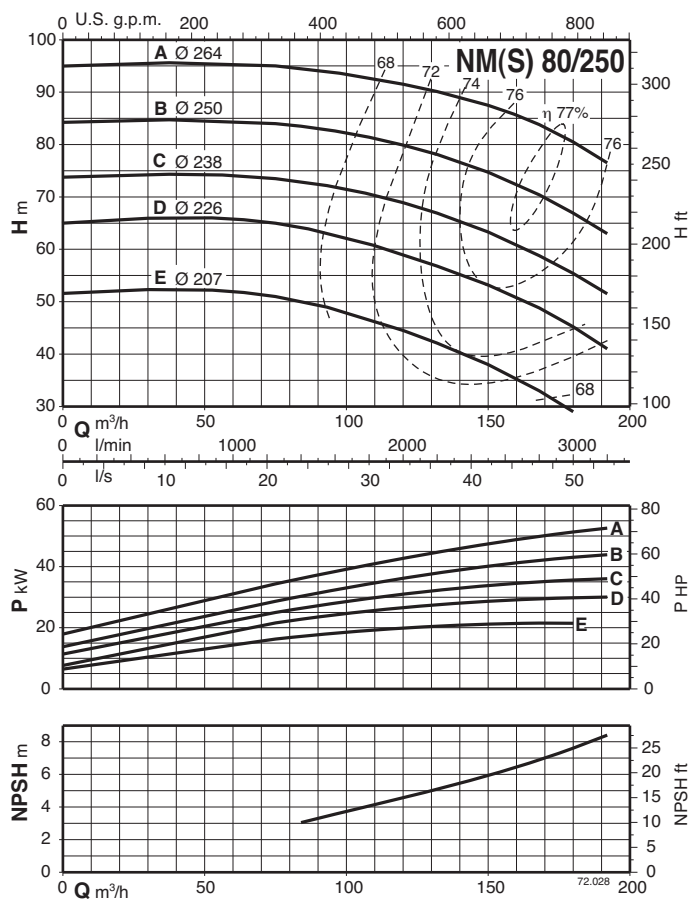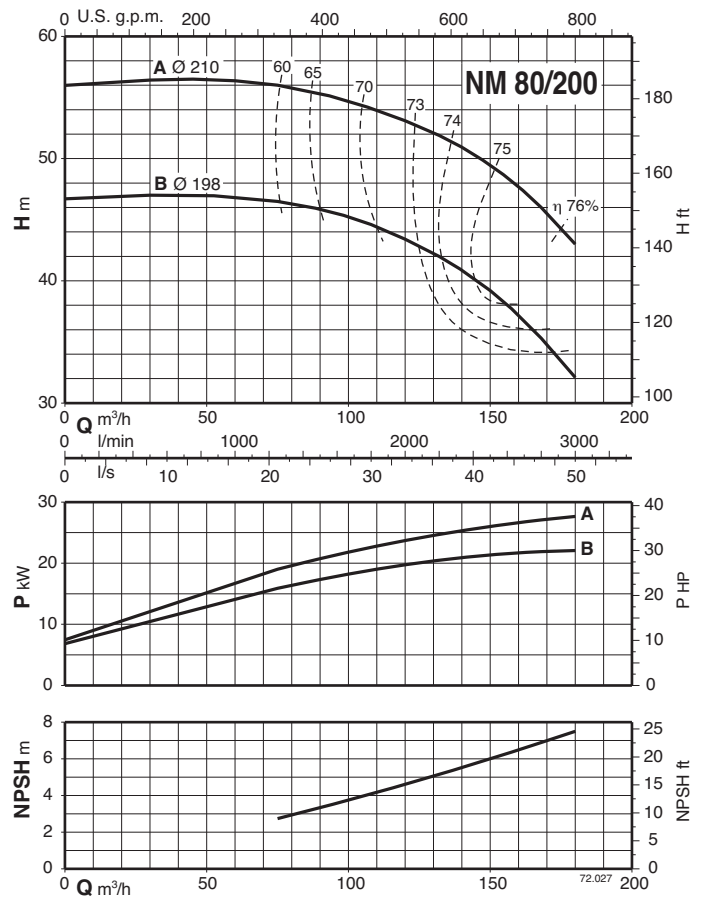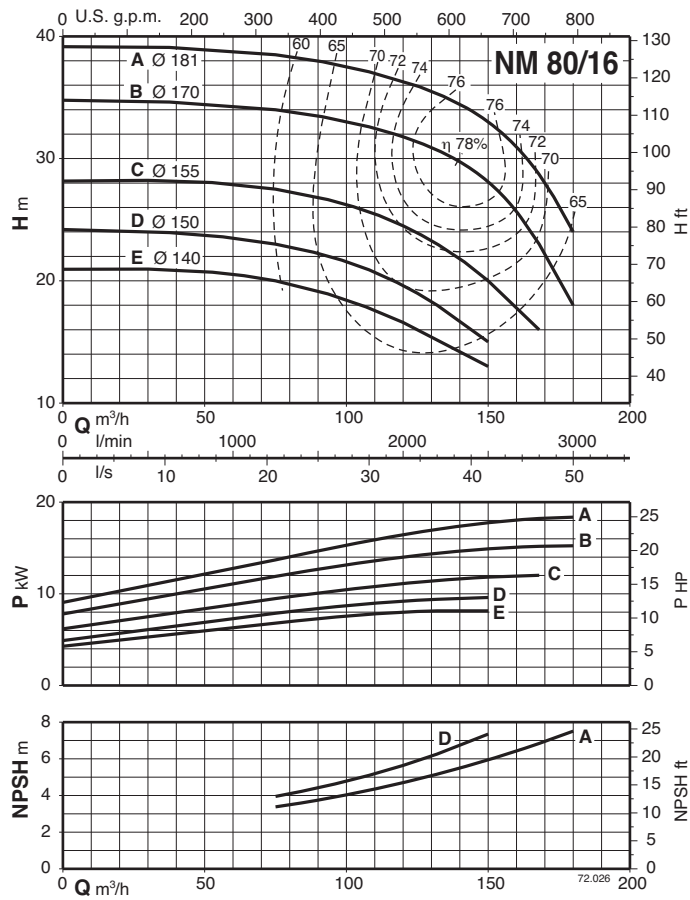

NM, NMS Close Coupled Centrifugal Pumps with flanged connections

Characteristic curves $n \approx 2900$ rpm

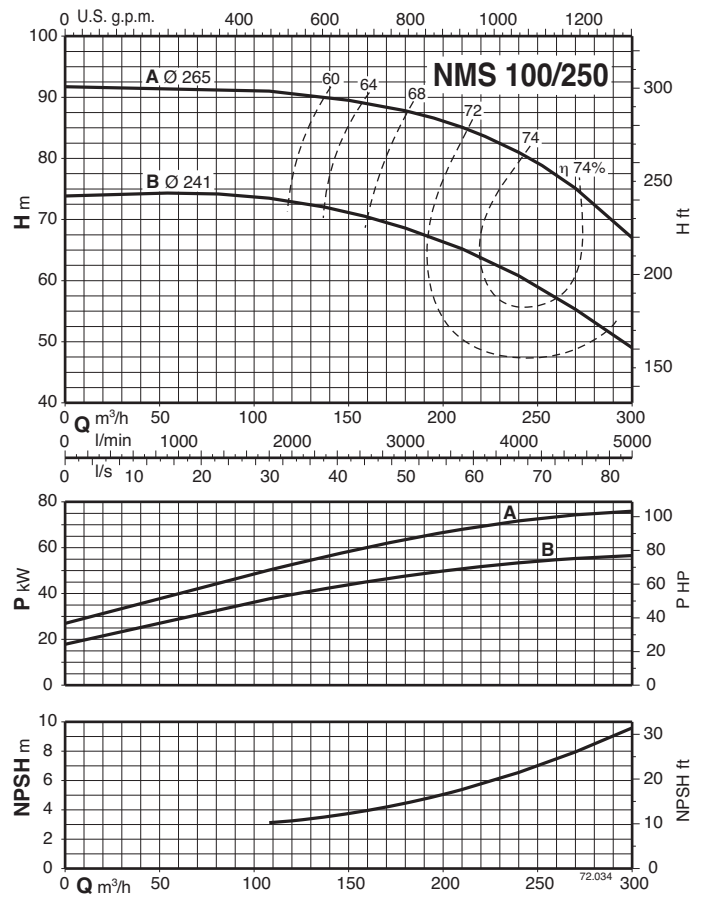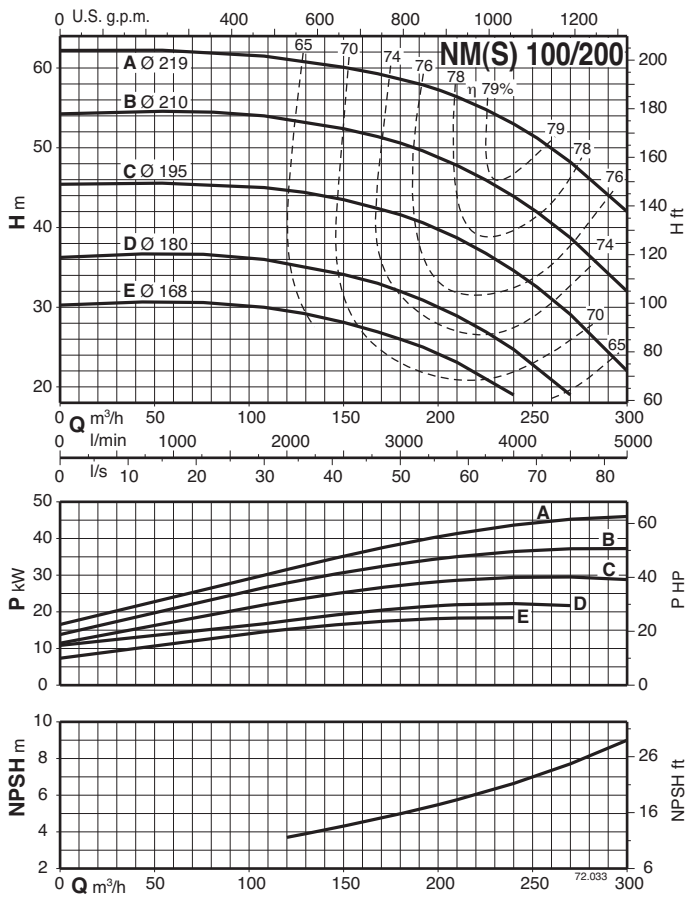


NM, NMS Close Coupled Centrifugal Pumps


with flanged connections

Dimensions and weights

1

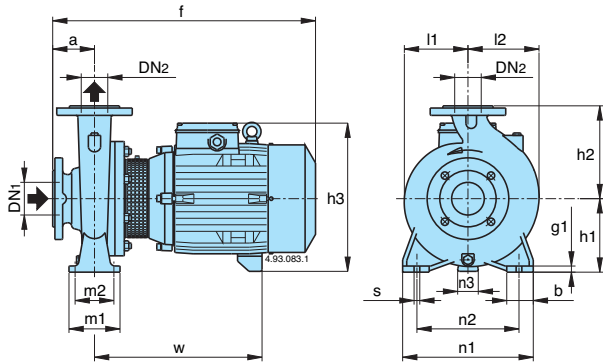


2

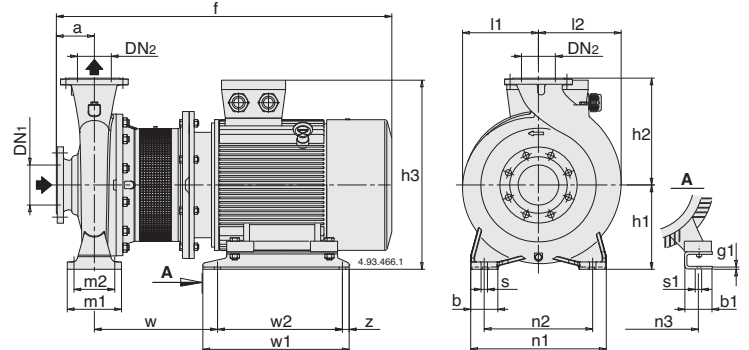

Picture	NM	mm																			kg
		DN1	DN2	a	f	h1	h2	h3	m1	m2	n1	n2	n3	z	b	s	l1	l2	w	g1	
1	NM 32/12SE-AE-DE-FE	50	32	80	405	112	140	240	100	70	190	140	37	-	50	14	93	97	245	12	27-25-24-24
	NM 32/16BE				410														250		34
	NM 32/16A/A	50	32	80	450	132	160	260	100	70	240	190	47	-	50	14	120	120	290	12	39
	NM 32/20D/A				450			288					62						290		42
	NM 32/20C/A	50	32	80	475	160	180	298	100	70	240	190	60	-	50	14	140	140	295	12	52
	NM 32/20A/A				475			298					60						295		52,5
	NM 40/12C/A-F/A	65	40	80	410	112	140	240	100	70	210	160	37	-	50	14	100	113	250	12	29-27
	NM 40/12A/B				450														290		34
	NM 40/16C/B				450			260					47						290		39
	NM 40/16B/B	65	40	80	475	132	160	270	100	70	240	190	45	-	50	14	119	119	295	12	48
	NM 40/16A/B				475			270					45						295		49,5
	NM 40/20C/A-D/A				495			298					60						295		55,5-55,5
	NM 40/20A/A-AR/A-B/A	65	40	100	525	160	180	320	100	70	265	212	49	-	50	14	140	140	320	12	72,5-66-66
	NM 40/25B/B-C/B				640														410		116-110
	NM 40/25A/B	65	40	100	715	180	225	365	125	95	320	250	50	-	65	14	175	175	460	15	145,5
	NM 50/12F/B				470			260					47						290		41
	NM 50/12D/B	65	50	100	495	132	160	270	100	70	240	190	45	-	50	14	121	137	295	12	50
	NM 50/12A/B-S/B				495			270					45						295		51,5-51,5
	NM 50/16A/B-B/B	65	50	100	525	160	180	320	100	70	265	212	49	-	50	14	127	141	320	14	70,5-64
	NM 50/20A/B-B/B				640														410		106-100
	NM 50/20S/B	65	50	100	720	160	200	345	100	70	265	212	40	-	50	14	140	153	460	15	124,5
	NM 50/25C/B				645														415		126
	NM 50/25B/B	65	50	100	720	180	225	365	125	95	320	250	50	-	65	14	175	175	465	15	144,5
	NM 50/25A/B				720														465		153
	NM 50M/E/A				700																135
	NM 50M/D/A	65	50	100	750	192	225	377	298	258	262	216	-	20	69	12	175	175	239	6*	151
	NM 50M/C/A				775																165
	NM 65/12E/A				495			298					60						295		55,5
	NM 65/12A/A-C/A	80	65	100	525	160	180	320	125	95	280	212	49	-	65	14	134	156	320	15	73,5-68
	NM 65/16D/A-E/A				525			320					49						320		75-70
	NM 65/16B/A-C/A	80	65	100	640	160	200	345	125	95	280	212	40	-	65	14	150	172	410	15	106-100
	NM 65/16A/A				715			345					40						460		133,5
	NM 65/20C/A																				139,5
	NM 65/20B/A	80	65	100	715	180	225	365	125	95	320	250	50	-	65	14	155	175	460	15	145
4	NM 65/200A/A	80	65	100	825	202	225	408	400	360	344	254	-	20	90	14	155	175	245	42*	185
	NM 65/250B/A-C/A	80	65	100	825	202	250	408	400	360	344	254	-	20	90	14	175	190	245	42*	201-195
1	NM 80/16E/A				545			340					60						320		83,5
	NM 80/16C/A-D/A				670			365					50						415		113-108
	NM 80/16B/A	100	80	125	745	180	225	365	125	95	320	250	50	-	65	14	165	193	465	15	142,5
	NM 80/16A/A				745			365					50						465		150
4	NM 80/200A/A-B/A	100	80	125	850	202	250	408	400	360	344	254	-	20	90	14	170	194	245	42*	200-194
	NM 80/250D/A-E/A	100	80	125	850	202	280	408	400	360	344	254	-	20	90	14	191	210	245	42*	209-203
	NM 100/200E/A				800			377					216						239	6	179
	NM 100/200C/A-D/A	125	100	125	850	192	280	408	400	360	344	254	-	20	90	14	180	212	245	42*	201-195

Flanges EN 1092-2



mm					
DN	C	K	D	Holes N° Ø	g2
32	76	100	140	4 19	18
40	84	110	150	4 19	18
50	99	125	165	4 19	20
65	118	145	185	4 19	20
80	132	160	200	8 19	22
100	156	180	220	8 19	24
125	184	210	250	8 19	24

Picture	NMS	mm																				kg		
		DN1	DN2	a	f1	f	h1	h2	h3	m1	m2	n1	n2	n3	b	b1	s	s1	l1	l2	w		w1	w2
2	NMS 65/250A	80	65	100	373	1032	200	250	505	160	120	360	280	318	80	83	18	19	175	190	406	355	305	
	NMS 80/250C	100	80	125	398	1057	200	280	505	160	120	400	315	318	80	83	18	19	200	210	406	355	305	
	NMS 80/250B	100	80	125	421	1130	225	280	550	260	220	410	315	356	80	80	18	19	225	225	445	361	286	
	NMS 80/250A				451	1198	250		642					406		100		24	275	275	619	409	349	
	NMS 100/200B	125	100	125	398	1057	200	280	505	160	120	360	280	318	80	83	18	19	200	212	406	355	305	
	NMS 100/200A	125	100	125	421	1130	250	280	550	260	220	410	315	356	80	80	18	19	225	225	445	361	286	
	NMS 100/250B	125	100	125	466	1213	250	280	642	260	220	410	315	406	80	100	18	24	275	275	494	409	349	
	NMS 100/250A					1286	280		712					457		100		24		516	479	368		


Pumps with packed gland, dimensions available on request.

NM, NMS Close Coupled Centrifugal Pumps


with flanged connections

Dimensions and weights

3

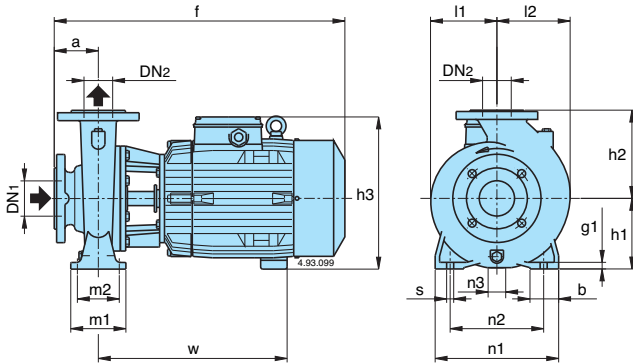


4

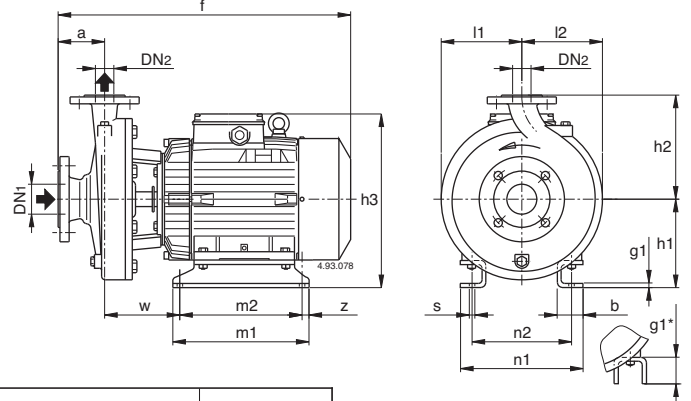

Picture	B- NM	mm																			kg
		DN1	DN2	a	f	h1	h2	h3	m1	m2	n1	n2	n3	z	b	s	l1	l2	w	g1	
1	B-NM 32/12S-A-D-F	50	32	80	405	112	140	240	100	70	190	140	37	-	50	14	93	97	245	12	33-32-31-29
	B-NM 32/16B B-NM 32/16A/A	50	32	80	410 450	132	160	260	100	70	240	190	47	-	50	14	120	120	250 290	12	44 48
	B-NM 32/20D/A B-NM 32/20C/A B-NM 32/20A/A	50	32	80	450 475 475	160	180	288 298	100	70	240	190	45 60 60	-	50	14	140	140	290 295 295	12	52 60 61,5
	B-NM 40/12C-F B-NM 40/12A/A	65	40	80	410 450	112	140	240	100	70	210	160	37	-	50	14	100	113	250 290	12	35-33 40
	B-NM 40/16C/A B-NM 40/16B/A B-NM 40/16A/A	65	40	80	450 475 475	132	160	260 270 270	100	70	240	190	47 45 45	-	50	14	119	119	290 295 295	12	48 56 57,5
	B-NM 40/20C/A-D/A B-NM 40/20A/A-B/A	65	40	100	495 580	160	180	298 320	100	70	265	212	60 49	-	50	14	140	140	295 375	12	63,5-62,5 80,5-75
3	B-NM 4025/B/B-C/B B-NM 4025/A/B	65	40	100	635 705	192	225	377	298	258	262	216	-	20	69	12	175	175	174	6	130-124 159,5
1	B-NM 50/12F/A B-NM 50/12D/A B-NM 50/12A/A-S/A	65	50	100	470 495 495	132	160	260 270 270	100	70	240	190	47 45 45	-	50	14	121	137	290 295 295	12	52 61 63,5-63,5
3	B-NM 50/160A/B-B/B	65	50	100	580	160	180	320	100	70	265	212	49	-	50	14	127	141	375	14	80,5-74,5
4	B-NM 50/200A/B-B/B B-NM 50/200S/B	65	50	100	695 720	192	200	377	298	258	262	216	-	20	69	12	140	153	234	6	128-121 140,5
	B-NM 5025/C/B B-NM 5025/B/B B-NM 5025/A/B	65	50	100	635 710 710	192	225	377	298	258	262	216	-	20	69	12	175	175	174	6	135 144 161
	B-NM 5025/65E/A B-NM 5025/65D/A B-NM 5025/65C/A	65	50	100	635 710 710	192	225	377	298	258	262	216	-	20	69	12	175	175	174	6	135 156,5 161
	B-NM 65/125A/A-C/A B-NM 65/160D/A-E/A B-NM 65/160C/A	80	65	100	580 575 660	160	200	320 345	125	95	280	212	49 40	-	65	14	134	156	375 375 430	15	93,5-73 83,5-79 108
4	B-NM 65/160B/A B-NM 65/160A/A	80	65	100	695 770	192	200	377	298	258	262	216	-	20	69	12	150	172	234	6	149 178,5
	B-NM 65/200B/A-C/A B-NM 65/200A/A	80	65	100	775 825	192 202	225	377 408	298 400	258 360	262 344	216 254	-	20	69 90	12 14	155	175	239 245	6 42*	183-169,5 200
	B-NM 65/250B/A-C/A	80	65	100	825	202	250	408	400	360	344	254	-	20	90	14	175	190	245	42*	216-210
	B-NM 80/160E/A B-NM 80/160D/A	100	80	125	605 685	180	225	340 365	125	95	320	250	60 50	-	65	14	165	193	375 430	15	108,5 116
4	B-NM 80/160C/A B-NM 80/160B/A B-NM 80/160A/A	100	80	125	725 800 800	192	225	377	298	258	262	216	-	20	69	12	165	193	239	6	155 175,5 182

Flanges EN 1092-2



mm						
DN	C	K	D	Holes		g2
				N°	Ø	
32	76	100	140	4	19	18
40	84	110	150	4	19	18
50	99	125	165	4	19	20
65	118	145	185	4	19	20
80	132	160	200	8	19	22
100	156	180	220	8	19	24
125	184	210	250	8	19	24

Picture	B-NMS	mm																							kg			
		DN1	DN2	a	f1	f	h1	h2	h3	m1	m2	n1	n2	n3	z	b	b1	s	s1	l1	l2	w	w1	w2		g1		
2	B-NMS 65/250A	80	65	100	373	1032	200	250	505	160	120	360	280	318	-	80	83	18	19	175	190	406	355	305	-			
	B-NMS 80/200B	100	80	125	398	936	180	250	386	125	95	345	280	254	20	65	60	14	15	170	194	259	350	310	6			
	B-NMS 80/200A	100	80	125	398	936	180	250	386	355	305	388	318	254	20	83	60	19	15	170	194	259	350	310	6			
	B-NMS 80/250D-E	100	80	125	398	936	200	280	406	160	120	400	315	254	20	80	60	18	15	191	210	259	350	310	6	6		
	1057					505			318					-	83		19		200	406		355	305	6				
	B-NMS 80/250B	100	80	125	421	1130	225	280	550	260	220	410	315	356	-	80	80	18	19	225	225	445	361	286	-			
	B-NMS 80/250A				451	1198	250		642					406			-		100	24	275	275	619	409	349	-		
	B-NMS 100/200E	125	100	125	398	857	200	280	406	160	120	360	280	216	20	80	69	18	15	180	212	259	350	310	6			
	B-NMS 100/200C-D					936			505					318	-		80		60	18		15	180	212	406	355	305	-
	B-NMS 100/200B					1057			505					318	-		80		83	19		200	406	355	305	-		
B-NMS 100/200A	125					100			125					421	1130		250		280	550		260	220	410	315	356	-	80
B-NMS 100/250B	125	100	125	466	1213	250	280	642	260	220	410	315	406	-	80	100	18	24	275	275	494	409	349	-				
B-NMS 100/250A					1286	280		712					457			-		100	24	275	275	516	479	368	-			